



**F91B RHN20-130  
JUMBO NAILER**



**TOOL-  
FEATURES**

- Reduced recoil and accurate balance
- Extruded aluminium alloy magazine with dry fire lock-out device
- Double grip for better handling

**JUMBO  
STRIP NAILS**

- Material: standard steel, high carbon steel, stainless steel 1.4301 & 1.4401, aluminium
- Finish: bright, electro-galvanized, hot dipped
- True hot dipped galvanized: AFTER production the loose nails are dipped in a molten zinc bath

**JUMBO  
SCRAIL®**

- Finish: bright, electro-galvanized, FASCOAT®, painted
- Optional available with DIAMOND COATING for maximum holding power
- Up to the length of 160 mm


**DESCRIPTION**

Many different sizes, finishes, and shank deformations are available beyond our standard range due to our flexibility in manufacturing. Also available with the new and powerful patented DIAMOND COATING: polymeric bonding agent, contains various expansion elements, more than 150 % increase in holding power, approx. 20 % reduced drive energy.

**DIAMOND COATING**  
Highly Adhesive



WITHDRAWAL VALUES:  
Spruce Wood

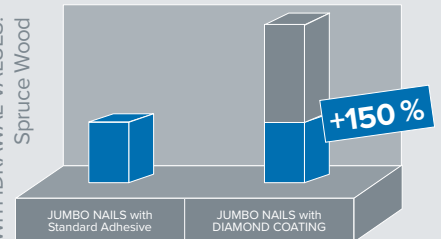

# F91B RHN20-130

## APPLICATIONS

- Heavy duty framing
- Heavy duty pallets, crating and dunnage
- Landscape timbers
- Wharves, docks and boardwalks
- Log home construction and roof connections
- Concrete forms and retaining walls

## HANDLING

1. Load fastener from the top into the magazine
2. Connect air supply
3. Beware of recoil. Keep firm hold of the tool with both hands at all times
4. Avoid a dry or dirty tool by lubricating respectively cleaning regularly

## TOOL CHARACTERISTICS

Height	Width
440 mm	180 mm
17.40 inch	7.09 inch
Length	Weight
560 mm	6,70 kg
22.10 inch	14.80 lbs

### Pressure

7 - 8.0 bar | 100 - 120 psi

### Air consumption per shot

3.74 L. | 0.132 SCF

Performance at 90 psi | 6.2 bar  
(0.62 MPa)

## FASTENER DATA

	JUMBO nails
Diameter	3,80 - 4,20 mm 0.148 - 0.165"
Head	7 - 8 mm 0.275 - 0.315"
Length	80 - 130 mm 3 1/8 - 5 1/8"
Shank Type	smooth   ring   screw   twisted/ spiral   square   barbed
Capacity	50
Nail Type	20° Plastic Strip JUMBO Nails

## FASTENER DATA

	JUMBO SCRAIL®
Diameter	3,5 - 4,2 mm 0.138 - 0.165"   3,8 - 4,4 mm 0.150 - 0.173"
Head	7 - 9 mm 0.275 - 0.354"
Length	80 - 130 mm 3 1/8 - 5 1/8"
Capacity	50
SCRAIL®	20° Plastic Strip JUMBO SCRAIL®

## NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$  : 96.80 dB (A) -  $K_{WA,1s}$  , 2.5

$L_{pA,1s}$  : 92.20 dB (A) -  $K_{pA,1s}$  , 2.5

## VIBRATION VALUE

(UNI ISO/TS 8662-11)

5.30 m/s<sup>2</sup>

## ACTUATION & LOADING

Actuation System:

Full sequential actuation

Loading: Top Loading

## VARIATIONS

- F91BC RHN20-160 for nails up to 160 mm

